

Human Factors Operability Timeline Analysis to Improve the Processing Flow of the Orion Spacecraft

Roland Schlierf & Damon B. Stambolian
NASA Kennedy Space Center (KSC)
Constellation Ground Operations Project
JFK Space Center
KSC, FL 32899

roland.schlierf-1@nasa.gov & damon.b.stambolian@nasa.gov

List of co-authors: Darcy Miller, NASA KSC; Juan Posada, BOE KSC;

Mike Haddock, NASA KSC; Mike Haddad, NASA KSC; Donald Tran, NASA KSC; Gena Henderson, NASA KSC; and Tim Barth, NASA Engineering and Safety Center (NESC)

Abstract— The Constellation Program (CxP) Orion vehicle goes through several areas and stages of processing before its launched at the Kennedy Space Center.^{1 2} In order to have efficient and effective processing, all of the activities need to be analyzed. This was accomplished by first developing a timeline of events that included each activity, and then each activity was analyzed by operability experts and human factors experts with spacecraft processing experience. This papers focus is to explain the results and the process for developing this human factors operability timeline analysis to improve the processing flow of Orion.

Following each issue discovered during the analysis the necessary analysis design engineering was brought into the process in order to address the issue for design improvements.

2. PURPOSE AND DRIVER OF TIMELINE ANALYSIS

The purpose of the timeline analysis was to look at each step of the ground processing of the Orion vehicle as it goes through the different stages of processing at KSC, with an human factors and operations eye on the hardware human interactions affecting the human performance during assembly, maintenance, inspection of Orion at KSC.

When an issue was discovered in the timeline, applicable standards were married with the issue. These standards mainly came from the Federal Aviation Administration (FAA) Human Factors Design Standards (HFDS). This process was basically stripping out the applicable FAA requirements that apply to ground processing of Orion, given the operations methodologies specially derived by the Ground Operations Project (GOP) to meet the CxP directives for CxP. The requirements derived during this exercise may or may not be applicable to another vehicle. If the processes are different during a different timeline, then another analysis would need to be performed.

TABLE OF CONTENTS

1. INTRODUCTION.....	1
2. PURPOSE AND DRIVER OF TIMELINE ANALYSIS	1
3. TIMELINE OVERVIEW	1
4. ANALYSIS METHODS AND DEVELOPMENT	2
5. EXAMPLES FROM THE ANALYSIS.....	3
6. LESSONS.....	5
7. FUTURE PLANS	5
8. CONCLUSIONS	6
REFERENCES	6
BIOGRAPHY	7

1. INTRODUCTION

The Constellation Program (CxP) Orion vehicle goes through several areas and stages of processing before its launched at the Kennedy Space Center. During all of the stages of this flow the ground processes were analyzed. This was accomplished by first developing a timeline of events that included each activity, and then each activity was analyzed by operability experts and human factors experts with spacecraft processing experience. A human factors analysis tool was adapted for this activity. Several human factors, and operations experts were brought together for a small team to perform this analysis.

3. TIMELINE OVERVIEW

The Orion processing time line includes Delivery from the Orion assembly line (located at KSC), Orion Processing in Multi Purpose Processing Facility, Orion/Ares Integration and Testing in the Vehicle Integration Building (VAB), Pad Operations, Landing and Recovery and, Post Flight processing.

For each location, a functional flow block diagram was developed. An example of the Functional Flow Block Diagram (FFBD) for the VAB is shown in figure 1.

¹978-1-4244-7351-9/11/\$26.00 ©2011 IEEE.

² IEEEAC paper #1021, Version 3, Updated January 12, 2011

5. EXAMPLES FROM THE ANALYSIS

Three human factors interface issues from Figure-2 will be explained here as examples. First a summary is given, and then each category with its corresponding content from each cell is listed. Figure-2 snapshot of the tool was continued to show left and right halves for easier reading.

- ISSUE - (Communication, visibility by operator to pallet corners): Alignment of pallet into bay.
- ACTION - Assure method to prevent contact and misalignment of pallet with existing bay structure during installation/removal of short stack pallet.

- RS - FAA.

Location	Human/System Interfaces (Primary)	Human Interface	Task	FFBD Event and Number	Tasks and Issues and Actions	Req Source	Section Title	Sub-Section Title	Requirement	Conditions	Possible Consequences
MPPF	Short stack pallet			FFBD # 2.3.7 and 3.11.3	TASK: Move short stack pallet into and out of servicing bay ISSUE - (Communication, visibility by operator to pallet corners): Alignment of pallet into bay ACTION: Assure method to prevent contact and misalignment of pallet with existing bay structure during installation/removal of short stack pallet	FAA	2 General Design Requirements	2.5.1 Incorporate Safety Factors 2.5.2 Fail Safe Design 2.5.3 Error Resistant 2.5.4 Error Tolerant.	Users shall be protected from making errors to the maximum possible extent.	LOCATION: Inside MPPF	GSE damage, delay
MPPF	ECS transport purge hoses and connectors			FFBD # 2.1.3, 2.3.5, 3.11.5, 4.2.3	TASK: Connect, Disconnect and stow ECS Hoses from KAMAG Source ISSUE - (Lifting, handling - pulling): Weight, flexibility of hose. The connection is low to the ground. ACTION: Assure the hoses can be lifted by the technicians (Two person lift)	FAA	4.2.2 Weight	4.2.2.6 Maximum weight of units of equipment to be carried by more than one person.	If a unit of equipment is designed to be carried by two people, the weight carried by either one of them shall not exceed 19 kg (42 lb); thus, if the weight of the unit is distributed uniformly, the maximum weight of the unit is 38 kg (84 lb). This limit applies to carrying distances up to 10 m (33 ft).	LOCATION: Inside MPPF and VAB	Injury, GSE damage, delay
MPPF	Short stack pallet guard rails			FFBD # 2.1.3, 2.3.5, 3.11.5, 4.2.3	TASK: Remove guard rails from short stack pallet ISSUE (Lifting, handling and awkward positions): Weight and size of guard rails ACTION: Assure the guard rails can be lifted by the technicians (One or Two person lift)	FAA	4.2.2 Weight	4.2.2.6 Maximum weight of units of equipment to be carried by more than one person.	If a unit of equipment is designed to be carried by two people, the weight carried by either one of them shall not exceed 19 kg (42 lb); thus, if the weight of the unit is distributed uniformly, the maximum weight of the unit is 38 kg (84 lb). This limit applies to carrying distances up to 10 m (33 ft).	LOCATION: Inside MPPF and VAB	Injury, GSE damage, delay

Figure 2 Continued – Left side of Figure-2

For Example #1 in the spreadsheet, the task of moving the short stack pallet into and out of servicing bay was evaluated. See figure 3 of the short stack pallet in the servicing bay. Alignment of pallet into the servicing bay was considered an issue that required further evaluation. An action was taken to assure a method is put in place to prevent contact and misalignment of pallet with existing bay structure during installation/removal of short stack pallet. A human factors requirement was evaluated and applied to the task that states “Users shall be protected from making errors to the maximum possible extent”. A recommendation was provided to the design team to install guide rails on floor. The spreadsheet fields were populated as follows:

- H/SI, - Short stack pallet.
- FFBD Event Number, - 2.3.7 and 3.11.3
- TIAs –
 - TASK: Move short stack pallet into and out of servicing bay.

- RST - 2-General Design Requirements.
- RSST - 2.5.3 Error Resistant.
- RV - Users shall be protected from making errors to the maximum possible extent.
- PC - GSE damage, delay.
- PP - Nominal Use and Maintenance.
- PVM - Analysis.
- PL – 2.
- PRC - 2.
- PRP - 4.
- NCR - Conceptual design does not address this issue.
- PR- Install guide rails on floor.
- Notes - Maintenance is to address pallet storage without Orion Short Stack.
- TA – Team Members to assess this human factors item and respond to team lead.



Figure 3 - Short Stack Pallet at servicing bay of Multi Payload Processing Facility (MPPF) building.

For Example #2 in the spreadsheet, the task of connecting, disconnecting, and stowing hoses from transporter was evaluated. The weight and flexibility of the hoses was considered an issue. An action was taken by the team to assure the hoses can be lifted by the technicians. Human factors requirements for maximum weight of units of equipment to be carried by more than one person were assessed. If a unit of equipment is designed to be carried by two people, the weight carried by either one of them shall not exceed 19 kg (42 lb); thus, if the weight of the unit is distributed uniformly, the maximum weight of the unit is 38 kg (84 lb). This limit applies to carrying distances up to 10 m (33 ft). It was recommended to change the design of the hoses to be in sections to reduce weight to below these human factors requirements. The spreadsheet fields were populated as follows:

- H/SI - ECS transport purge hoses and connectors.
- FFBD Event Number, - 2.1.3, 2.3.5, 3.11.5, 4.2.3
- TIAs -
 - TASK: Connect, Disconnect and stow ECS Hoses from KAMAG Source.
 - ISSUE - (Lifting, handling - pulling): Weight, flexibility of hose. The connection is low to the ground.
 - ACTION: Assure the hoses can be lifted by the technicians (Two person lift).
- RS - FAA.
- RST - 4.2.2 Weight.
- RSST - 4.2.2.6 Maximum weight of units of equipment to be carried by more than one person.
- RV - If a unit of equipment is designed to be carried by two people, the weight carried by either one of them shall not exceed 19 kg (42 lb); thus, if the weight of the unit is distributed uniformly, the maximum weight of the unit is 38 kg (84 lb). This limit applies to carrying distances up to 10 m (33 ft). Injury, GSE damage, delay.
- PC - Injury, GSE damage, delay
- PPs - Nominal Use and Maintenance. Inspection.
- PL - 3.

- PRC - 2.
- PRP - 6.
- NCR - the lift requires more than 44 pounds per person and awkward postures.
- PR - Consider making hoses in sections to reduce weight. The notes were, "History of back and shoulder injuries from similar tasks (disconnecting and storing these hoses at pad). See Gap Requirement (NIOSH lifting equation)for awkward body positions.
- TA - Rogelio to assess this human factors item and respond to team lead. The CV was that there was no human shown.

For Example #3 in the spreadsheet, the task of removing guard rails from short stack pallet was also addressed. It had a similar issue to the hoses described above. The issue was for the weight and size of guard rails. An action was taken by the team to assure the guard rails can be lifted by the technicians. Similar human factors requirements applied. It was recommended that the design ensure manageable size and weight of the guard rails that meets the requirements. The spreadsheet fields were populated as follows:

- H/SI - Short stack pallet guard rails.
- FFBD Event Number, 2.1.3, 2.3.5, 3.11.5, 4.2.3
- The TIAs are
 - TASK: Remove guard rails from short stack pallet.
 - ISSUE (Lifting, handling and awkward positions): Weight and size of guard rails.
 - ACTION: Assure the guard rails can be lifted by the technicians (One or Two person lift).
- RS - FAA.
- RS - 4.2.2.
- RST - 4.2.2 Weight.
- RSST - 4.2.2.6 Maximum weight of units of equipment to be carried by more than one person
- RV – If a unit of equipment is designed to be carried by two people, the weight carried by either one of them shall not exceed 19 kg (42 lb); thus, if the weight of the unit is distributed uniformly, the maximum weight of the unit is 38 kg (84 lb). This limit applies to carrying distances up to 10 m (33 ft).
- PC - Injury, GSE damage, delay.
- PPs - Assembly/Installation, Nominal Use, and Off-Nominal Use.
- PVM - Inspection.
- PRL -3.
- PRC - 2.
- PRP - 6.
- NCR - current conceptual design does not address this issue.

Assembly/Installation	Nominal Use	Maintenance	Off-Nominal Use	Emergency Use	Disassembly/Disposal	Multi-Element	RQ Satisfied? (Y/N)	Primary Verification	Priority Rank Likelihood	Priority Rank Consequence	Priority Rank Product	Why Non-Compliant	Potential Recommendations	Notes:	Team Action	Comment for Video
X	X	X					N	Analysis	2	2	4	Current conceptual design does not address this issue	Install guide rails on floor	Maintenance is to address pallet storage without Orion Short Stack	Tom Miller and Mario Relvini to assess this human factors item and respond to team lead (Roland Schlierf)	
X	X		X				N	Inspection	3	2	6	Lift requires more than 44 pounds per person and awkward postures.	Consider making hoses in sections to reduce weight.	History of back and shoulder injuries from similar tasks (disconnecting and storing these hoses at pad). See Gap Requirement (NIOSH lifting equation) for awkward body positions.	Rogelio Franco to assess this human factors item and respond to team lead (Roland Schlierf)	no human shown
X	X	X	X				N	Inspection	3	2	6	Current conceptual design does not address this issue	Design manageable size and weight guard rails.	The guard rails are located on the short stack pallet.	Randy Eastman to forward to LM Short Stack pallet POC for disposition and respond to team lead (Roland Schlierf)	

Figure 2 Continued – Right side of Figure-2

- PR - Design manageable size and weight guard rails. The notes are that the guard rails are located on the short stack pallet.
- TA - Randy to forward to LM Short Stack pallet POC for disposition and respond to team lead.

6. LESSONS

This section is a collection of lessons learned that will be documented into the NASA Integrated Lessons Learned system. <http://nen.nasa.gov/portal/site/llis/LL/> Lessons learned include both positive lessons as well as lessons for making improvements.

- (1) The NASA CxP program level human factors requirements document HSIR greatly promoted better human factors Systems Engineering and Integration. This improved the integration between ground systems, crewed vehicle designs for ground processing [4].
- (2) Early collaboration and planning between the flight and ground hardware designers for human factors operability engineering analysis (HFEA) is necessary.

- (3) Timeline analysis is great way to analyze and improve the design of ground and flight hardware interfaces for ground processing of the ground equipment, and the flight and ground hardware interface.
- (4) Although the HFOEA was primarily applied to Orion and GS to improve the design of hardware for better human factors and operations, some areas of HFOEA can be used to improve the work operations documents and processes. Example, for hazard warnings signs being called out in the work steps, etc.
- (5) Employ qualified human factors person/s on team from the beginning of the Project.
- (6) Human factors engineers should perform the human factors assessments as embedded members of the HFOEA design teams.

7. FUTURE PLANS

- (1) Continue applying these processes and collaborations to future NASA missions in the 21st Century. Specifically the timeline option to the Human Factors Engineering Analysis Tool (HFEAT) where applicable.
- (2) Promote more design integration processes and designs between KSC, MSFC, and JSC, by using the timeline option for human factors operations engineering analysis.
- (3) Promote sharing of this process across Centers, projects, and with commercial partners.
- (4) Embed HFEA and HFOEA as part of the Engineering processes, as a decision tools to choose from for the appropriate human factors engineering analysis.
- (5) Continue using the design visualization process, where operations met with the design visualization folks in the design visualization lab and reviewed the flight and GSE designs for human factors. These important meetings with the operations and design engineers using the actual flight and ground designs loaded into the design visualization tools were a great help.
- (6) Introduce motion capture analysis into applicable activities during the human factors operability engineering timeline analysis, especially where a worksite analysis is needed or where two or more projects interface, Ares/Orion/GO [3]. See Figure-4 Motion capture allows for quicker and simpler and real to life simulations, and the computer models will include the CAD flight hardware and human Avatar which the envelope spaces between the human and flight hardware can be viewed, and the stresses to the human can be computed. See reference [3] for how motion capture was used during development of Orion for ground operations. See reference [4] for more on the CxP level 2 requirements that promoted better design of flight hardware for ground processing.
- (7) Promote more HFEOA timeline analysis with the ground support equipment, such as the flight and ground interface at the umbilical plates and the ground commodity connections to flight hardware.
- (8) Use the design problems and solutions from this HFEOA effort to improve the NASA STD 3001, to promote better NASA human factors Systems Engineering and Integration in future programs.
- (9) Employ the human factors systems engineering processes and lessons learned from Orion to future launch vehicles.

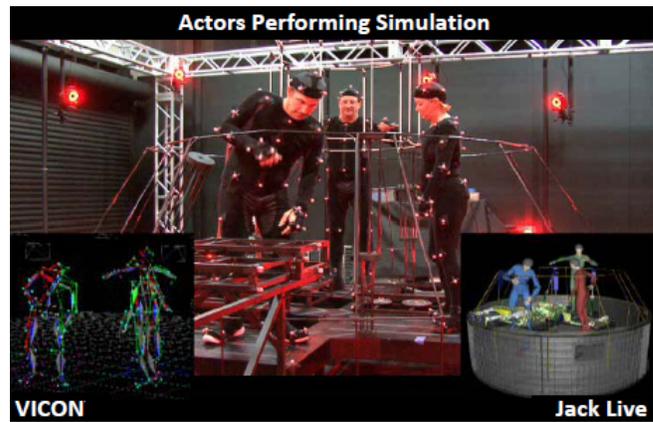


Figure 4 - Motion Capture of Operations inside the Orion vehicle.

8. CONCLUSIONS

This paper described the successful modification and application of the HFEA Tool for a timeline human factors operability engineering analysis for the Orion vehicle. Through this and other human interface analysis there was great progress made during CxP with collaboration between the Orion Project, Ground Operations Project and KSC Design Engineering. The most difficult and time consuming aspects of the development of these teams and analysis during CxP were during the forming, storming and norming stages, to get to the performing stages where we are today. Now that this has been accomplished, these methods and collaborations for human factors operability engineering analysis will continue to improve and carry over as we lead the nation in developing spacecraft systems for future missions.

REFERENCES

- [1] Damon B. Stambolian, Scott Wilson, Kirk Logsdon, Darcy Miller, Jihan Dinally, Jason, Masse, and Tim Barth. "1-G Human Factors for Optimal Processing and Operability of Constellation Ground Systems" 2009 IEEEACpaper#1286
- [2] Damon B. Stambolian, Dr. Gena Henderson, Ms. Darcy Miller, Mr. Gary Prevost, Mr. Donald Tran, and Dr. Tim Barth. "1-G Human Factors for Optimal Processing and Operability of Ground Systems up to CxP PDR" 2011 IEEEAC paper#1007

[3] Jeffrey S. Osterlund & Brad A. Lawrence. 61st Virtual Reality: Avatars in Human Spaceflight Training. International Astronautical Congress, Prague, CZ. Copyright ©2010 by the International Astronautical Federation.

<http://kave.ksc.nasa.gov/HEMAP/HEMAP2010/HEMAP2010.mp4>

[4] Dischinger, Charles H. Jr. and Stambolian Damon B. and Miller Darcy H. "The first development of human factors engineering requirements for application to ground task design for a NASA flight program"

Aerospace SAE Publications 2008-01-2103

<http://papers.sae.org/2008-01-2103>

BIOGRAPHY



Damon Stambolian is currently working on a PhD in Industrial Engineering focusing his research on Biomechanics at the University of Miami's Biomechanics Laboratory. He is also currently working in the KSC Engineering Directorate at Kennedy Space Center. Prior to working in the

Engineering Directorate he worked in; the Constellation Ground Operations Project office, the Space Station Program within the Orbiter Space Plane Project at KSC, and the Space Shuttle Program at KSC. Within these Programs he was involved with human factors related process improvements for ground processing operations, i.e., assembly, maintenance, inspection of flight hardware.

List of acknowledgements for others that had influenced the development of the CxP GOP human factors at KSC; Jeffrey Angermeier, Kelvin Manning, Gary Letchworth, Doug Nelson, Brad Lawrence, Rogelio Franco, Randy Eastman, Tom Miller and Mario Relvini, Jason Hopkins, Chris Thompson, Jeanie Ruiz, Matt Craycraft, Gary Richards, Bob Ruiz, and Blake Hale.

